

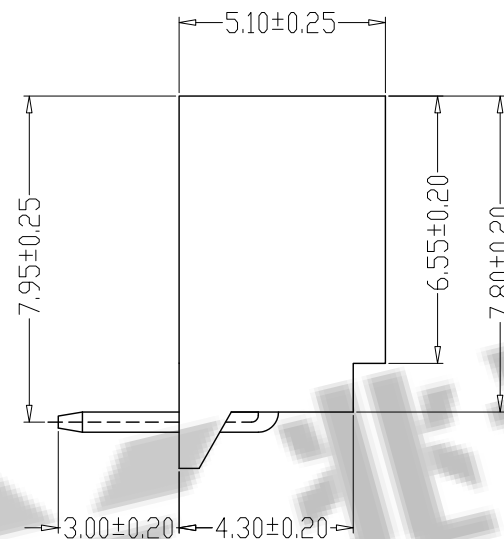
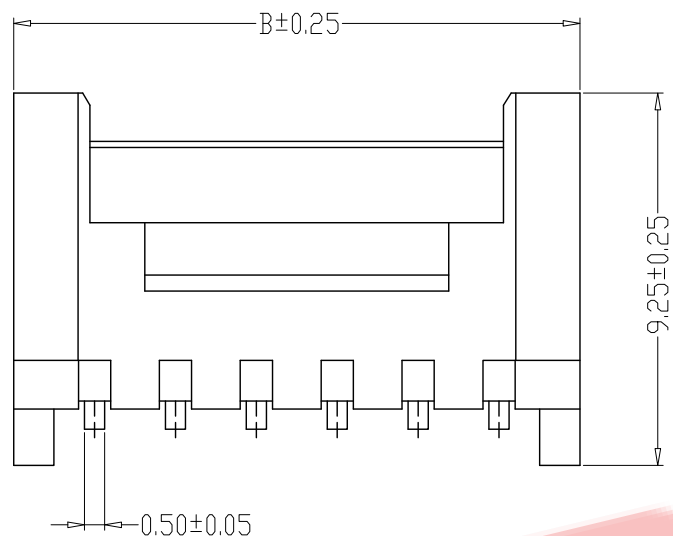


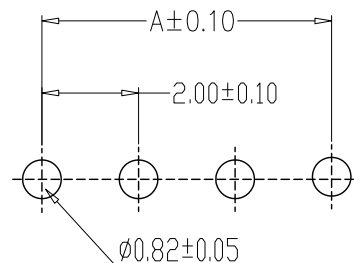

SPECIFICATIONS

- 1、Current Rating: 2A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1000V AC/minute
- 7、Material: Wafer Nylon66, UL94V-0
PIN Brass Tin-plated

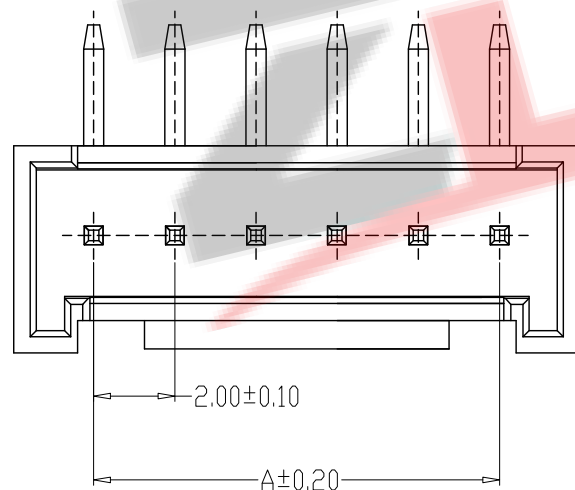

PCB LAYOUT

PIN=NAW	尺寸 (mm)	
	A	B
A2006-02AW	2.00	6.00
A2006-03AW	4.00	8.00
A2006-04AW	6.00	10.00
A2006-05AW	8.00	12.00
A2006-06AW	10.00	14.00
A2006-07AW	12.00	16.00
A2006-08AW	14.00	18.00
A2006-09AW	16.00	20.00
A2006-10AW	18.00	22.00
A2006-11AW	20.00	24.00
A2006-12AW	22.00	26.00
A2006-20AW	38.00	42.00

制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENERAL TOLERANCE		制图 DRAWING	钱岳生	料号 PART NO.	ZDX-A2006-NAW	版本 REV.	A
			X.±0.25	X.'±2°	审核	2021、05、03	品名 TITLE	HY弯针	页次 SHEET	1/1
			.X±0.20	.X'±1°	核准	2021、05、04	客户料号 CUTM. NO.	WAFER DIP TYPE		
			.XX±0.15	.XX'±0.5°	核 准 APPROVAL	2021、05、05				
			.XXX±0.10	.XXX'±0.5°	单位 UNITS	MM	比例 SCALE	1:1	ZDX 深圳市兆达鑫科技有限公司 Shenzhen zhaodaxin Technology Co., Ltd	