
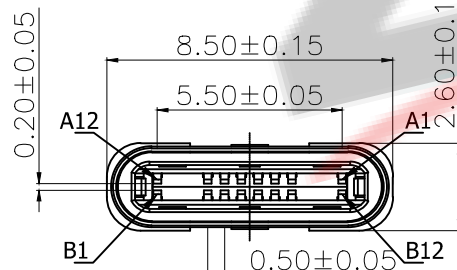
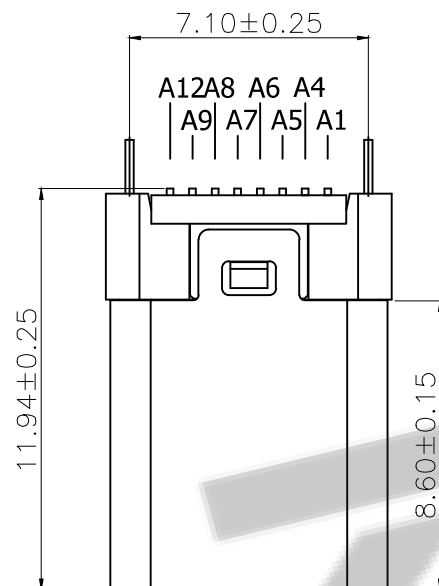
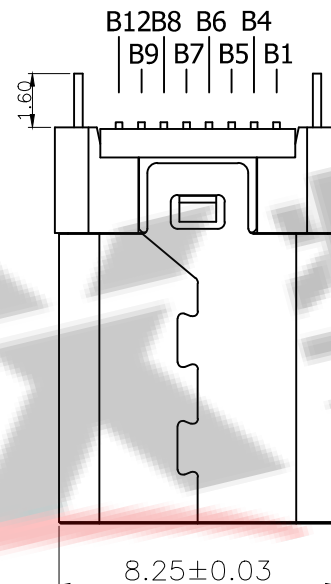


RECOMMENDED PCB LAYOUT(t=0.80±0.05)
COMPONENT SIDE(GENERAL TOLERANCE:±0.05)

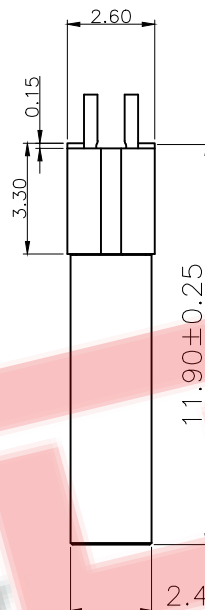

NOTES:

1.MECHANICAL:

- MATING FORCE: 5-20N .
- UNMATING FORCE: 8-20N .
- DURABILITY: 10000 CYCLES MIN.

2.ELECTRICAL:


- CURRENT: 5.0A MAX
- VOLTAGE: 20V MAX
- WITHSTANDING VOLTAGE: 100V AC
- CONTACT RESISTANCE: 40 mΩ MAX INITIAL;
50 mΩ MAX AFTER 10000 CYCLES

3.ENVIRONMENTAL


- OPERATING TEMPERATURE RANGE -30°C ~ +80°C

NO.	DESCRIPTION	QTY.	MATERIAL	TREATMENT
④	GND LATCH	1	STAINLESS STEEL	NICKEL PLATED OVERALL,TAB WITH LEAD FREE TIN ALLOY
③	CONTACT	16	COPPER ALLOY	NICKEL UNDERPLATING OVER ALL,GOLD PLATING AT CONTACT AREA,LEAD FREE TIN ALLOY AT TERMINATION
②	SHELL	1	STAINLESS STEEL	CLEAN.
①	HOUSING	2	THERMOPLASTIC UL 94V-0	MOLDED COLOR:BLACK,white

料号编码:

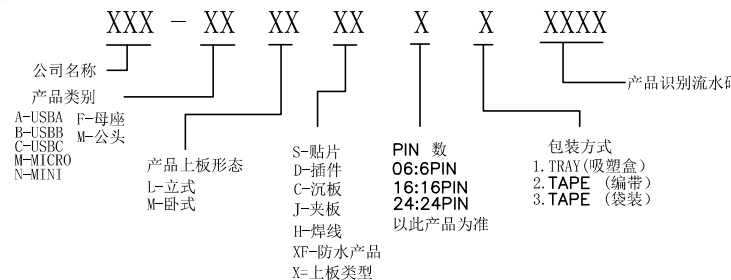

USB TYPE C 接线示意图

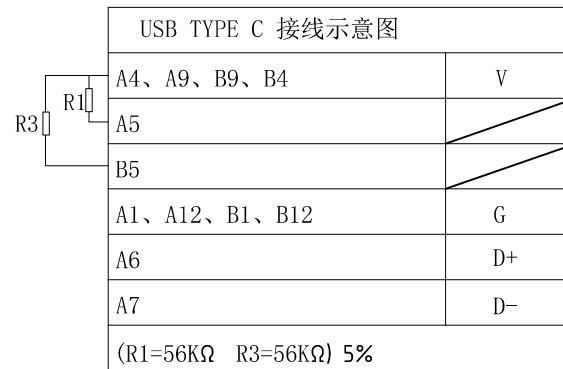

- 规格
- LCP黑
- LCP白
- PA9T黑
- PA9T白



深圳市兆达鑫科技有限公司
Shenzhen zhaodaxin Technology Co., Ltd

TITLE: TYPE-C 16PIN立式贴片公头H=11.94MM		PART NO.: ZDX-CMLS162CY20		
工程图		TEL: 0755-29888153		
THIRD ANGLE PROJECTION		WEB: http://www.szzdjmkj.com/		
UNIT: mm	SCALE: 1:1	SIZE: A4	SHEET: 1/2	