






RECOMMENDED PCB LAYOUT(t=0.80±0.05)
COMPONENT SIDE(GENERAL TOLERANCE±0.05)

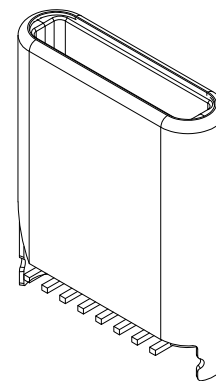

NOTES:


SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

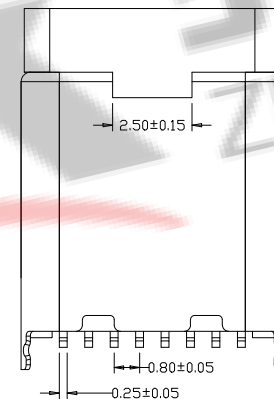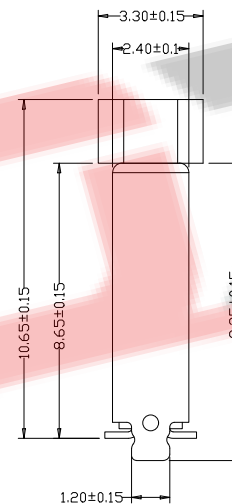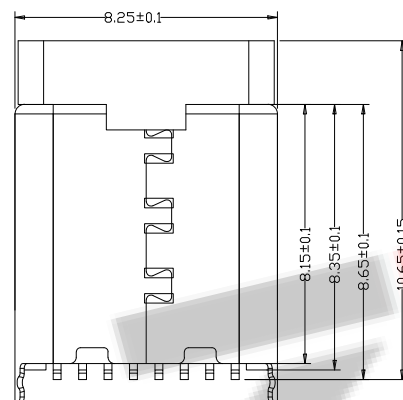

NO.	DESCRIPTION	MATERIAL	COLOR	REMARK
4	PLASTIC	HIGH TEMP	BLACK/WHITE	UL 94V-0
3	LATCH	STAINLESS STEEL	—	Ni Plated
2	TERMINAL	COPPER ALLOY	—	Gold Plated
1	SHELL	STAINLESS STEEL	—	Ni Plated

料号编码:

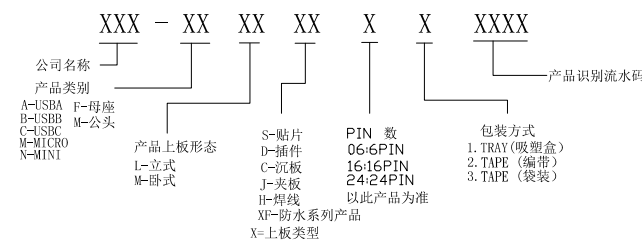

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
SIGNAL NAME	GND			V _{BUS}	CC1	Dp1	Dn1	SBU1	V _{BUS}			GND
PIN NUMBER	B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
SIGNAL NAME	GND			V _{BUS}	SBU2	Dn2	Dp2	CC2	V _{BUS}			GND

ZDX 深圳市兆达鑫科技有限公司
Shenzhen zhaodaxin Technology Co., Ltd

TITLE: TYPE-C 16P-M公头立式贴片H8.65mm		PART NO.:ZDX-CMLS1620023		
工程图		TEL:0755-29888153		
THIRD ANGLE PROJECTION		WEB:http://www.szzdjmkj.com/		
UNIT: mm	SCALE: 1:1	SIZE: A4	SHEET: 1/2	