

NOTES:

Housing: Thermoplastics,UL94V-0

Contact: Copper Alloy

Shell: Copper Alloy/Steel

Voltage Current Rating:1.5 AMP. 30V AC

Insulation Resistance:1000M Ω Min.Contact Resistance: 30 M Ω Max.

Dielectric Withstanding Voltage: 500W AC

Temperature Range: -35°C to +85°C

Insulator color: Black/White

Plastic material: PBT/LCP/Others

Shell finish: Nickel plated/Tin-Lead plated

Mechanical:

Mating Force: 3.5KG MAX

Unmating Force: 1.02 KG MIN.

Contact finish:

01: Selective Gold Flash

02: Selective Gold 3U"


03: Selective Gold 5U"

04: Selective Gold 15U"

05: Selective Gold 30U"

料号编码:

XXX	-	XX	XX	XX	X	X	XXXX	产品识别流水码
类别								
—母座								
—公头								
	产品上板形态		S-贴片	PIN 数			包装方式	
	L-立式		D-插件	06:6PIN			1. TRAY (吸塑盒)	
	M-卧式		C-沉板	16:16PIN			2. TAPE (编带)	
			J-夹板	24:24PIN			3. TAPE (袋装)	
			H-焊线	以此产品为准				
			XF-防水产品					
			X=上板类型					

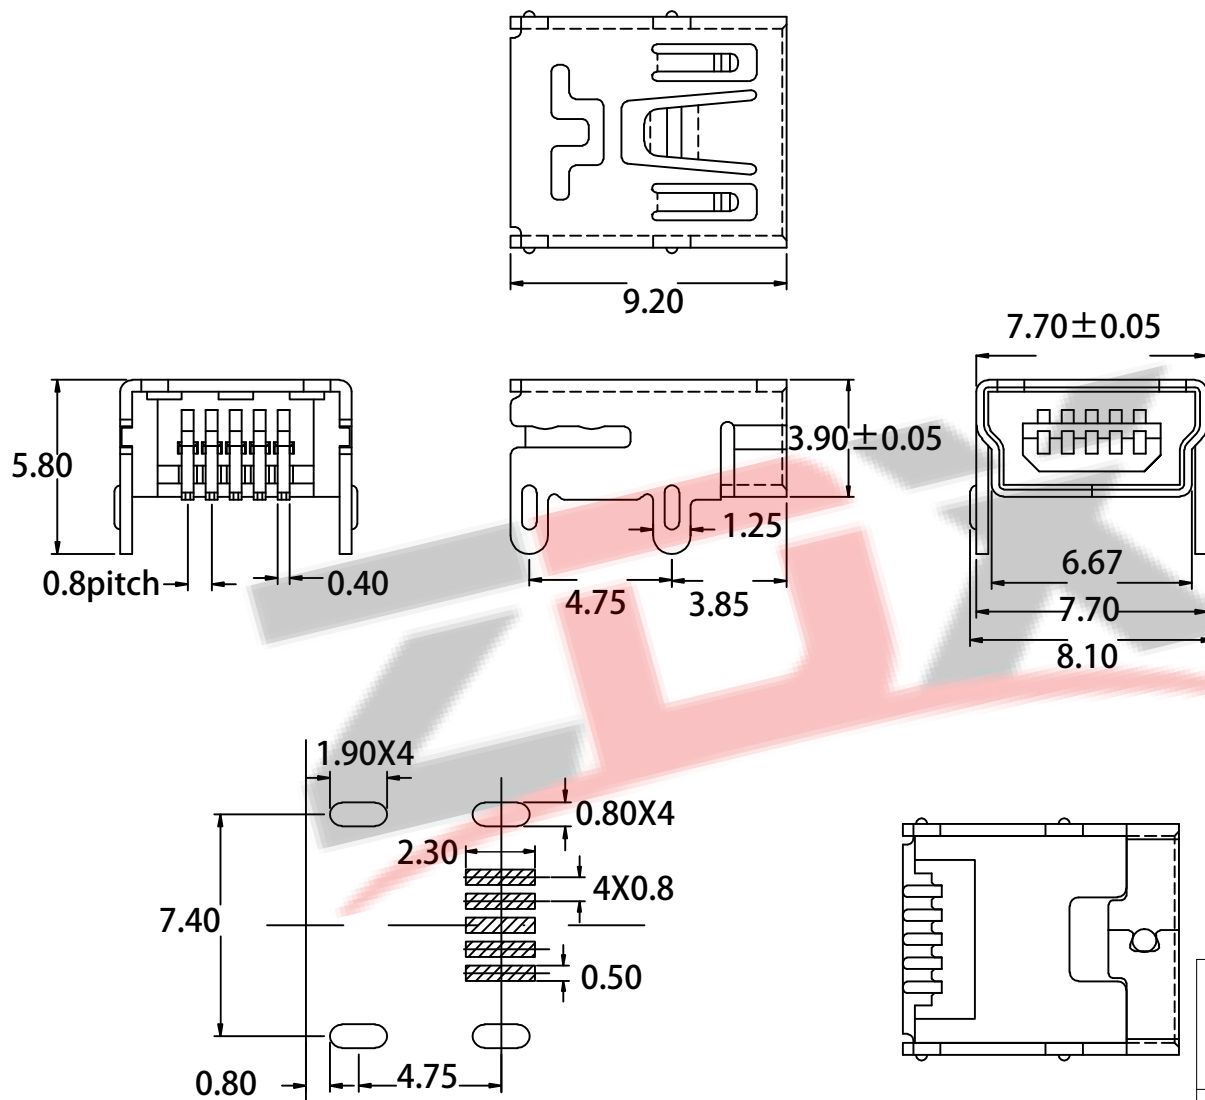

RECOMMENDED PCB LAYOUT



深圳市兆达鑫科技有限公司

Shenzhen zhaodaxin Technology Co., Ltd

TITLE:

MINI 5PIN 四脚插板+贴板


PART NO.: **ZDX-NFMS05ZD05**

TEL: 0755-29888153

工程图

WEB: <http://www.szzdjmj.com/>

THIRD ANGLE PROJECTION



UNIT:

mm

SCALE:

1:1

SIZE:

A4

SHEET:

1/2