


剖视图


剖视图

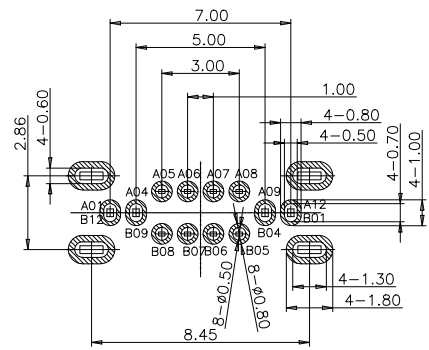

RECOMMENDED P.C.B. LAYOUT (俯视图)
TOLERANCE UNSPECIFIED ±0.05mm

特性:

- 一、电气性能: ELECTRICAL
 - 1. 额定电流: 5.0A
 - 2. 接触阻抗: 40 MILLIOHMS MAX
 - 3. 耐电压: 150V AC / 1 mA MAX
 - 4. 绝缘阻抗: 150V DC/100 MEGA OHMS MIN
- 二、机械性能:
 - 1. 插入力: 5~20N
 - 2. 拨出力: 8~20N
 - 3. 使用寿命: 10000次、拔出力 6N MIN
- 三、材料: MATERIAL
 - 1. 塑胶: LCP/PA9T UL94V-0
 - 2. 端子: C7025/C18400 T=0.15MM
 - 3. 外壳: SUS304 T=0.30MM
 - 4. 卡勾: SUS304 T=0.15MM
- 四、电镀: FINISH
 - 1. 端子: 接触点镀金3U~MIN
PIN脚焊接区域镀金1U~MIN.
 - 2. 外壳: 镀镍50U~MIN (盐雾48H)
- 五、电镀品需做粘锡测试: 粘锡面积达到95%以上.
- 六、SMT回流焊 (峰值260° C±5° C) 不能起泡、熔胶、变色不良 (变形在公差范围以内)
- 七、工作温度: -40° C~+85° C

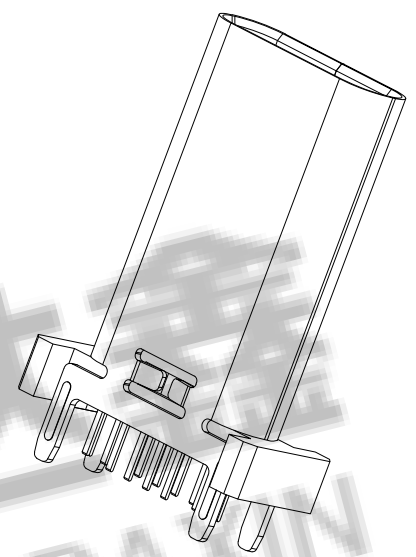

料号编码:

XXX - XX XX XX X X XXXX

| | | | | | | |
|------|------|--------|---|--|---|---------|
| 公司名称 | 产品类别 | 产品上板形态 | S-贴片 D-插件 C-沉板 J-夹板 H-焊线 XF-防水系列产品 X=上板类型 | PIN 数 06:6PIN 16:16PIN 24:24PIN 以此产品为准 | 包装方式 1. TRAY (吸塑盒) 2. TAPE (编带) 3. TAPE (袋装) | 产品识别流水码 |
|------|------|--------|---|--|---|---------|

| | | | |
|-----|-------------|-----|-------------|
| A1 | GND | B12 | GND |
| A4 | VBUS | B9 | VBUS |
| A5 | CC1 | B8 | SBU2 |
| A6 | D+ | B7 | D- |
| A7 | D- | B6 | D+ |
| A8 | SBU1 | B5 | CC2 |
| A9 | VBUS | B4 | VBUS |
| A12 | GND | B1 | GND |
| PIN | SIGNAL NAME | PIN | SIGNAL NAME |

ZDX 深圳市兆达鑫科技有限公司
Shenzhen zhaodaxin Technology Co., Ltd

| | | | | |
|-----------------------------------|---------------|-------------------------------|---------------|--|
| TITLE: TYPE-C/F 16PIN立式插板H18.5 | | PART NO.:ZDX-CFLD161ZD12 | | |
| 工程图 | | TEL:0755-29888153 | | |
| THIRD ANGLE PROJECTION | | WEB: http://www.szzdjmkj.com/ | | |
| UNIT: mm | SCALE: 1:1 | SIZE: A4 | SHEET: 1/1 | |